

TP03 TRASH PUMP DREDGE/DEWATERING

STANLEY®

The **TP03** is a self priming hydraulic dewatering and trash pump with 3" NPFT discharge.




SPECIFICATIONS

Capacity	3" NPTF with 3" Camlock
Performance	450 gpm / 1688 lpm
Flow Range	7-9 gpm / 26-34 lpm
Working Pressure	2000 psi / 140 bar
Full Relief Setting	2250 psi / 155 bar
Weight	31 lbs / 14 kg
Length	14" / 35½ cm
Width	12" / 30.4 cm
Hydraulic Ports	-8 SAE O-ring
Connection	¾" Male Pipe Adapter
Couplers	Yes
Hose Whips	No



With 450 gpm of output flow, this pump is an efficient way to move large volumes of liquid with concentrations of solids up to 25% by volume. The **TP03** handles solids up to 3" in size and is used for dredging and light cleaning tasks. The urethane bowl and impeller is abrasion resistant, resilient and impervious to petrochemical solvents. See chart below for gpm discharge at flow.

TP03 PERFORMANCE GRAPH

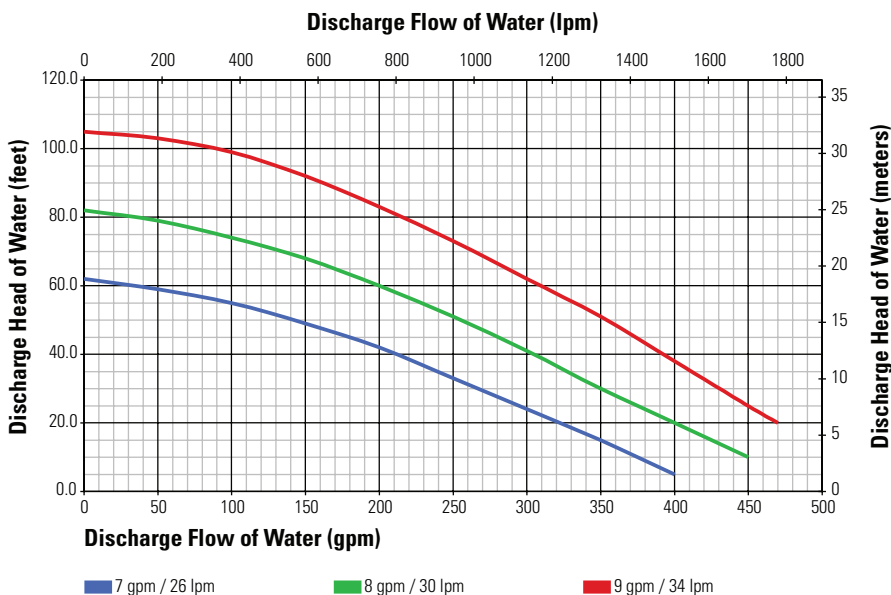

FEATURES

- Submersible and Self Priming
- Dredges solids up to 3" in size
- Removes sand, clay and mud from work structures
- 450 gpm (1688 lpm) discharge
- Easy bowl inspection and clean out
- Built in reverse flow check
- Can run dry without damage
- 3" discharge

TP03 TRASH PUMP DREDGE/DEWATERING

STANLEY®

ORDERING INFORMATION

PART NUMBER

TP0300301 Submersible Trash Pump, CE, urethane bowl & impeller, 450 gpm output, 3" NPTF/Camlock, with FF couplers

ACCESSORIES

03971 Flush-Face Coupling Set, 3/8" NPT

03974 Flush-Face Coupling Set, 1/2" NPT

06830 Hose Whip 18" long, -8 SAE x 1/2" NPT

31848 Dual Hose, 50' x 1/2", with couplers

31972 Dual Hose, 25' x 1/2", with couplers

58633 Twinned Hose, 25' x 1/2", with couplers

58634 Twinned Hose, 50' x 1/2", with couplers

52720 Coupler, 3" NPT x 3" Camlock

56761 Discharge Hose, lay-flat, 3" diameter x 25' with male & female 3" camlock couplers

15248 Adapter, 3", female camlock x male fire hose (NH) thread

When hydraulic hose exceeds 100' (30.4 m) in length, increase I.D. of both pressure and return hose. For more information, consult Stanley Hydraulic Tools.

IMPORTANT

To fill out a Product Warranty Recording form and for information on your warranty visit stanleyhydraulic.com and select the Warranty tab.



Note: The warranty recording form must be submitted to validate the warranty.

All Stanley Hydraulic Tools, parts, accessories and allied equipment are subject to design improvements, specifications and price changes at any time without notice and with no obligation to units already sold. Weights, dimensions and operating specifications listed herein are subject to change without notice. Where specifications are critical to your applications, please consult Stanley Hydraulic Tools.